


Floor Console (76.25.01)

Removal


All vehicles

- 1 . Detach the electronic passive anti-theft system (PATS) light.

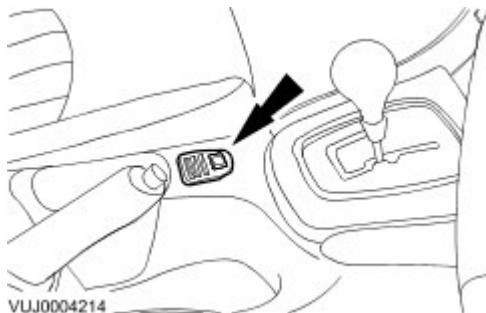


- 2 . Remove the PATS light.

▶ Disconnect the electrical connector.

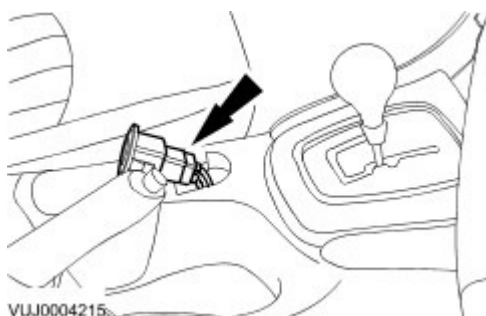


- 3 . Remove the hand brake lever surround.


- 1) Detach the hand brake lever surround.
- 2) Remove the hand brake lever surround.

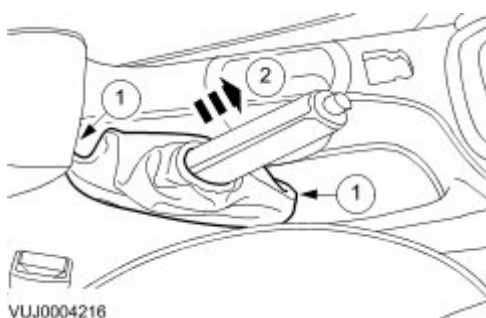


- 4 . Remove the console stowage compartment non slip mat.

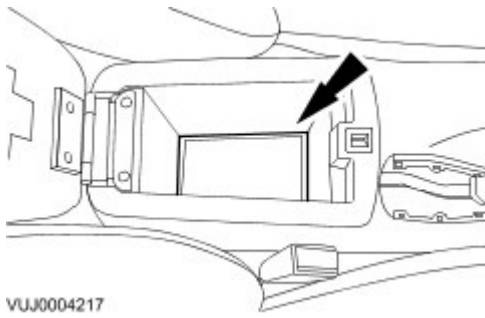


- 5 . Remove the retaining screws.

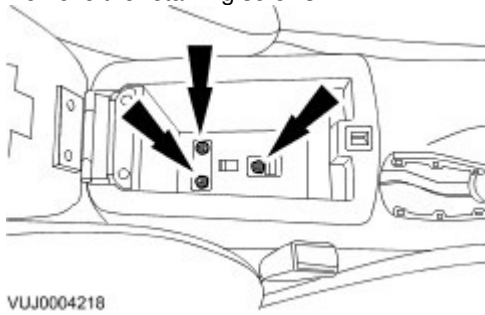

- 6 . Remove the center console trim panel.

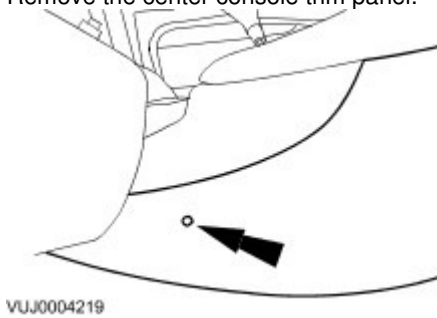


- 7 . Remove the center console trim panel.

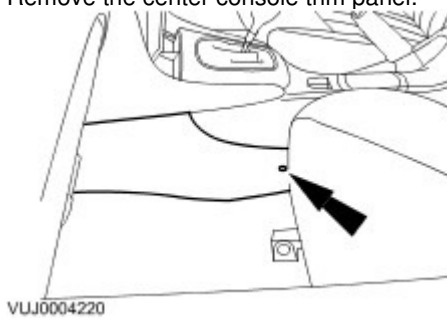

- 8 . **NOTE:**


Right hand shown, left hand similar.

Remove the retaining screws.

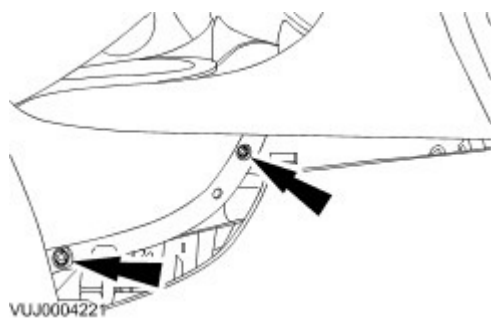

Vehicles with automatic transmission

9 . Remove the J-gate surround.

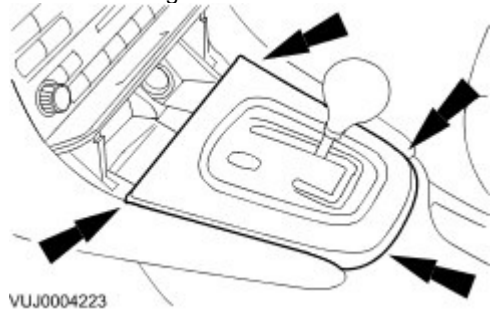


Vehicles with manual transmission

10 . Detach the gear selector surround.




All vehicles

11 . Remove the retaining screws.

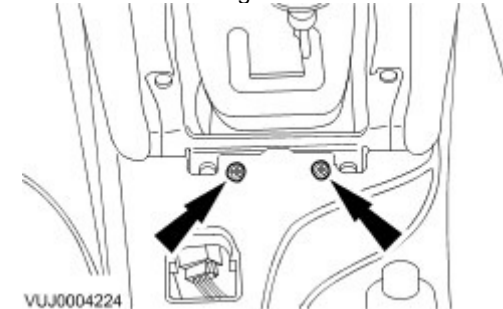


Vehicles with cordless cellular phone

12 . Disconnect the bluetooth upgrade module electrical connector.

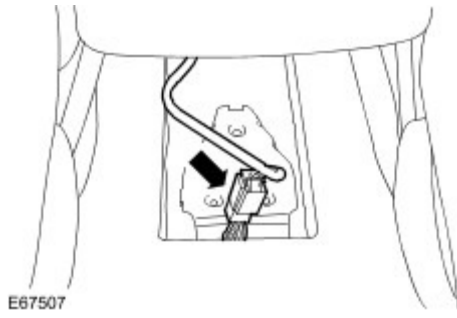

All vehicles

13 . Remove the floor console.

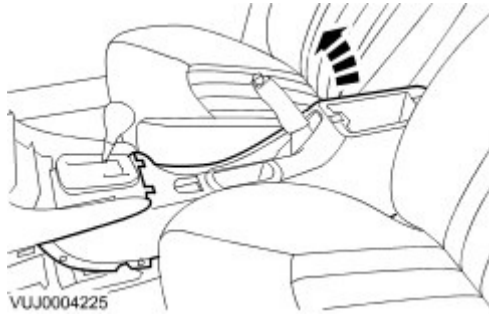

Installation

1 . To install, reverse the removal procedure.