


Front Bumper Cover Insert (76.22.73)


Removal

- 1 . Remove the front bumper cover. For additional information, refer to <<501-19>>.
- 2 . Remove the energy absorbing foam.
 - 1) Remove the energy absorbing foam retaining clips.
 - 2) Remove the energy absorbing foam.

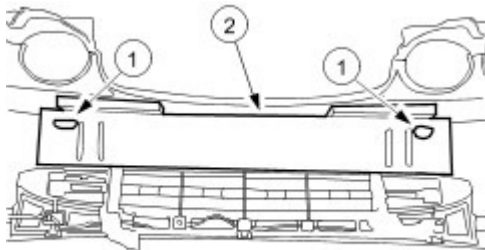

VUJ0004068

- 3 . Remove the bumper insert retaining clips.

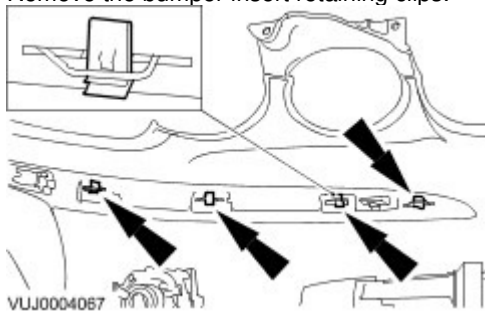

VUJ0004067

- 4 . Using a suitable thin lever to avoid damaging the paintwork, progressively ease the moulding away from the front bumper.



VUJ0004069

Installation

- 1 . To install, reverse the removal procedure.